

PRECISION FLAT FLOOR TOOLS



These extruded magnesium flat floor tools are specifically designed to improve floor or pavement flatness. Each tool comes standard with three 1.8 m clip-together aluminum handles, stabilising outriggers and equalizer pitch adjusting head for precise, even control.

BUMP CUTTER


Cuts down bumps and fills low areas after concrete slab has been floated.

CHECK ROD

Reduces bumps and fills low areas while the concrete is still plastic.

CHANNEL FLOAT

Use in place of traditional bull floats for flatter floors.

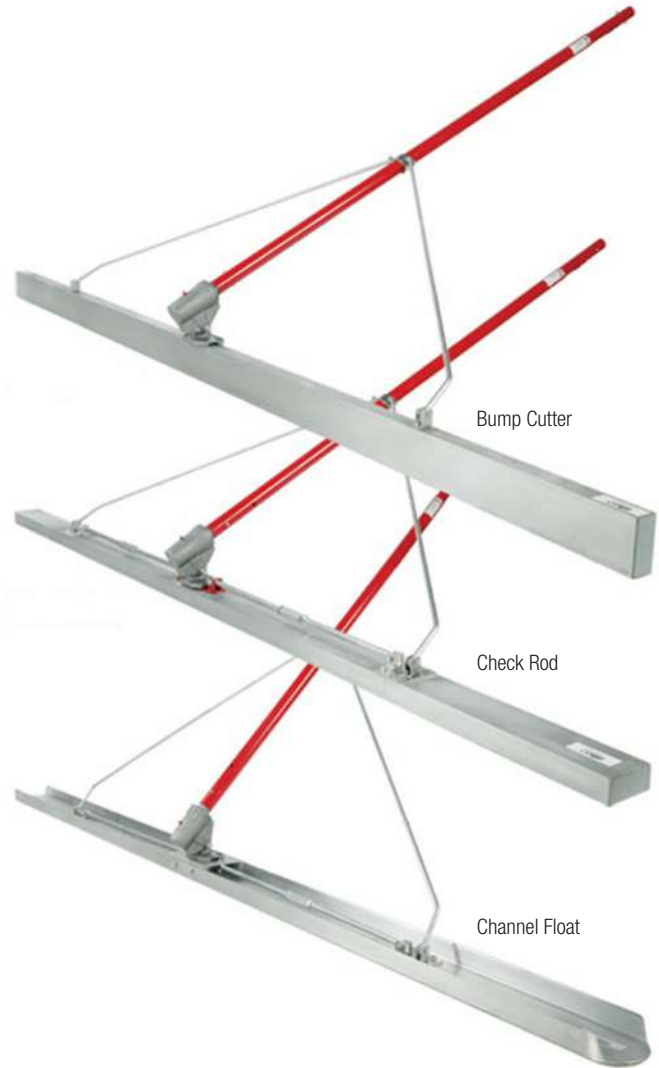

		BUMP CUTTER	CHECK ROD	CHANNEL FLOAT
Product Code		FR-3000BC	FR-3000CR	FR-3000CF
Operating Weight	kg	12	14	17
Extrusion Length	m (ft)	3.1 (10')	3.1 (10')	3.1 (10')
Dimensions (w x h)	mm (in)	51 x 102 (2' x 4')	102 x 51 (4' x 2')	152 x 51 (6' x 2')