

## Stable Grid™

Rigid equestrian surface reinforcement



## An Ideal Surface

Create a rigid and easy surface, ideal for long term stabilisation of training yards, stables and tracks.

The Atlantis **STABLE GRID™** system is the perfect companion for your prized animals creating ground stability and maintaining porosity of the ground.

Used in combination with our **Flo-Cell®** and **Flo-Log®** drainage products your grounds can be maintained free from water logging even during the heaviest rain events.


- Ideal for Gravel Containment
- Disperse Heavy Loads
- Excellent Drainage
- Easy on Horses legs
- Maintain Consistent Surface
- Prevents Soil Compaction
- Maintains Soil Porosity
- Suitable for Grass
- Protects Root Zone
- Sustainable Turf Life
- Easy Installation
- Rigid Clipping System
- Durable

**PREVENTS  
HOOF  
RUTS**




### Arena Application

- Ground Stability
- Excellent Drainage

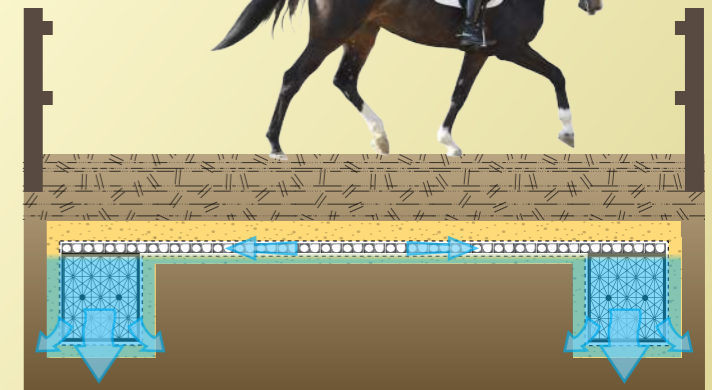

### Reinforced Grass Application


- Durable Reinforced Surface
- Rut Proof
- Ground Stability
- Excellent Drainage

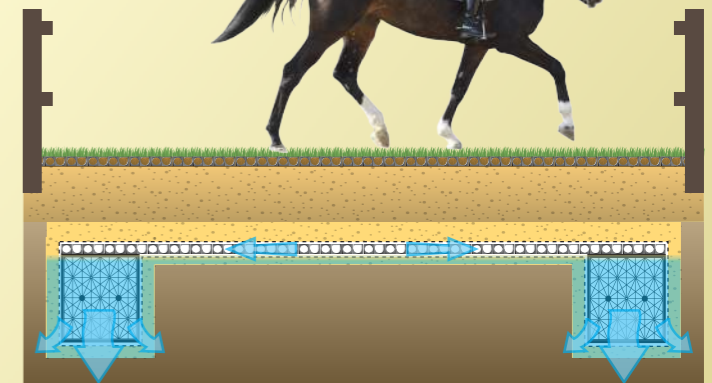

## Stable Grid™


Ideal for surface reinforcement of stables, training yards, arenas and tracks.

STABLE GRID™ PROTECTS GRASS

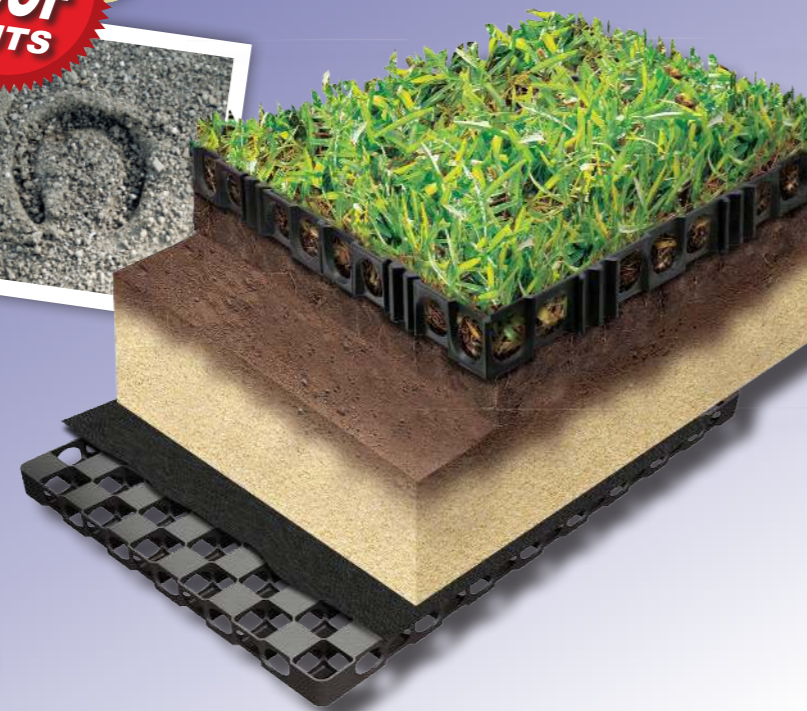

### Stables & Training Yards

- Durable Reinforced Surface
- Rut Proof
- Ground Stability
- Excellent Drainage

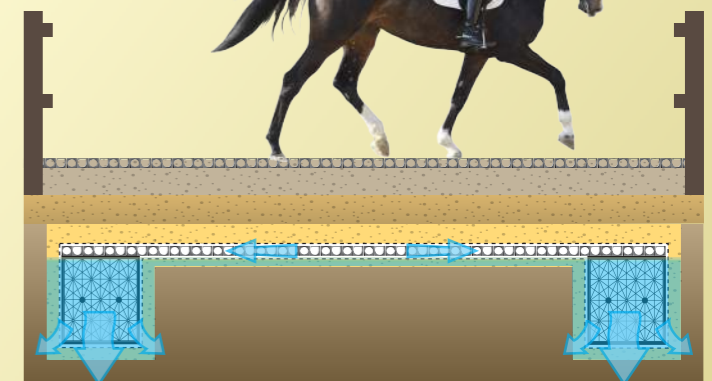

## Installation of Stable Grid™



## Adding Filler Material



ENJOY A  
DURABLE  
SURFACE THAT  
REQUIRES  
MINIMAL  
MAINTENANCE



## Stable Grid™ reinforcement structure (52mm Flo-Cell®)



### Specifications

Material	Recycled Polypropylene
Colour	Black
Weight	711gm, 5.7kg sqm
Size	260mm (W) x 480mm (L) x 52mm (T)
Compressive Strength	148.58 t/sqm (UNCONFINED)
Surface Void Area	>80%
Biological Resistance	Not affected by biological activity.
Chemical Resistance	Excellent resistance to Acids, Alcohols, Bases and Mineral Oils. Good resistance to Aldehydes, Esters, Aliphatic Hydrocarbons, Ketones and Vegetable Oils.
Recommended Service Temperature	-10°C to 110°C



**Atlantis Water Management**

PHONE: + 612 9417 8344

FAX: + 612 9417 8311

EMAIL: [info@atlantiscorp.com.au](mailto:info@atlantiscorp.com.au)

WEB: [www.atlantiscorp.com.au](http://www.atlantiscorp.com.au)

**Note:** Atlantis® products are manufactured from high quality recycled materials, carefully selected and under strict quality control procedures. The strength could vary slightly due to raw material, country of manufacture, manufacturing process and external conditions. All trademarks are the property of Atlantis Water Management Australia.

**Disclaimer:** All information provided in this publication is correct to the best knowledge of the company and is given out in good faith. This information is intended only as a general guide, no responsibility can be accepted for any errors, omissions or incorrect assumption. As each project is unique, and as Rebirth Pty Ltd, Atlantis Water Management, Atlantis Corporation Pty Ltd and its distributors and agents world wide have no direct control over the methods employed by the user in specifying, installing or supervising of its products hence no responsibility is accepted by Rebirth Pty Ltd, Atlantis Water Management, Atlantis Corporation Pty Ltd and its distributors and agents world wide. Users should satisfy themselves as to the suitability of the product for their purpose.

All product designs, and specification are subject to change without further notice. All Atlantis® products are tested in approved laboratories, and safe allowed tolerances should be practised in the actual field, to compensate for any unforeseen situations, on site and on products.

All material contained within this brochure is subject to copyright, and belongs to Atlantis Corporation Pty Ltd. No part of this brochure may be reproduced or transmitted in any form or by any means, electronic, mechanical, photocopying, recording or otherwise, without prior written permission of Atlantis Water Management, Atlantis Corporation Pty Ltd. Copyright © 2013